The Sensitivity of Power System Expansion Models on Meteorological Parameters

Bruno U. Schyska, Alex Kies, Markus Schlott, Lueder v. Bremen, Wided Medjroubi

Climate Forecasting for Energy Workshop 2020-12-04

German Aerospace Center (DLR), Institute of Networked Energy Systems



Knowledge for Tomorrow


Introduction

- Power system expansion models are a widely used tool to address research questions in the context of the energy transition.
- Based on their results far-reaching political and societal discussions are made.
- Models are optimization problems and rely on different socio-economical, technical and meteorological parameters:
 - Demand
 - Cost
 - Capacity factors
 - Efficiencies, emissions, ramping abilities





Parameter Uncertainty Example: Cost of Capital

Homogeneous reference

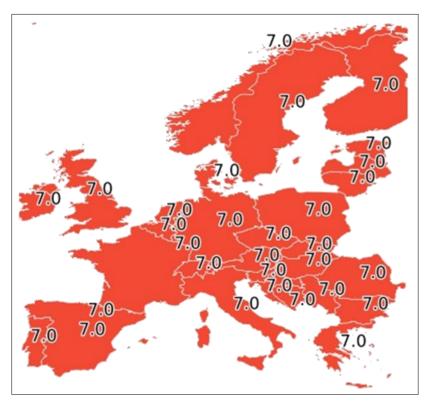


Inomogeneous scenario

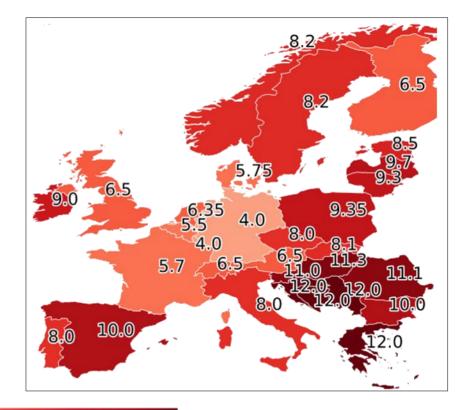



Parameter Uncertainty Example: Cost of Capital

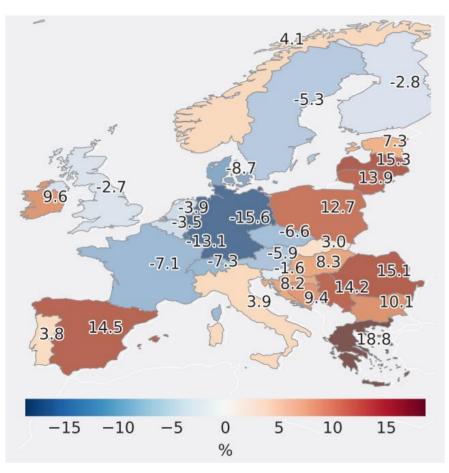

Relative change in expenditures for electricity [%]



Copyright © 2020, Bruno Schyska, DLR, Institute of Networked Energy Systems This work is licensed under a CC-BY-4.0 licence.

- Accumulation of generation capacity in countries with favourable conditions:
- > Higher share of wind power (esp. onshore)
- Lower share of solar PV
- ➢ Overall decrease in LCOE
- Increasing inequality in expenditures for electricity between central Europe and the periphery

Schyska and Kies (2020), Applied Energy, preprint on arxiv

Introduction

- Power system expansion models are a widely used tool to address research questions in the context of the energy transition.
- Based on their results far-reaching political and societal discussions are made.
- Models are optimization problems and rely on different socio-economical, technical and meteorological parameters:
 - Demand
 - Cost
 - Capacity factors
 - Efficiencies, emissions, ramping abilities
- Often, parameters are derived from **Future projections**, expansion is planned on **historical data** from **different data sources** (see poster of Alex Kies for a comparison of meteorological data sources).
- The choice of (uncertain) parameters affects the model results. But how?



Defining a Sensitivity Metric

Systematically describe the effect of different parameter choices on the simulation results —> measure the sensitivity

Define a metric which:

- quantitatively measures the sensitivity of power system expansion problems on specific parameter scenarios,
- allows to compare a great(er) number of scenarios,
- is symmetric about the choice/the order of the scenario,
- is greater equal zero


$$\mathbf{M}_{\alpha_j}^{\alpha_i} = \underbrace{\Gamma_{\alpha_j}^{\alpha_i}}_{\alpha_j} - \underbrace{\Gamma_0^{\alpha_j}}_{0} + \underbrace{\Gamma_{\alpha_j}^{\alpha_j}}_{\alpha_j} - \underbrace{\Gamma_0^{\alpha_j}}_{0}$$

- Two scenarios α_i and α_j
- Two unconstrained solutions for the two scenarios
- Two solutions for the two scenarios constrained with the respective other scenario

Schyska et al. (2020), to be submitted, preprint on arxiv



Computing the Metric

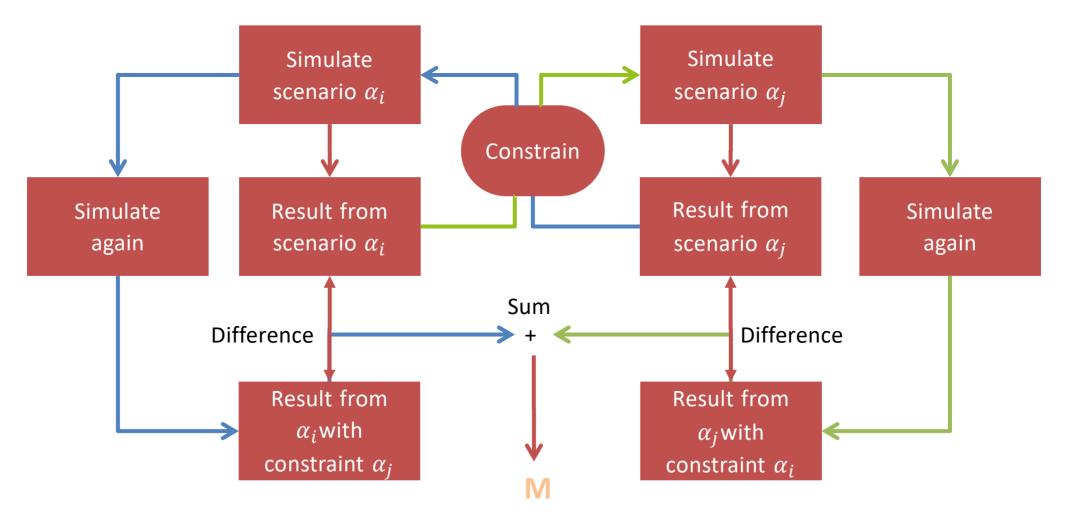



Computing the Metric: Cost of Capital Example

Levelized Cost for Electricity: $LCOE = \frac{Cost for Investment and Operation}{Demand met}$

	Hom. reference	Inh. scenario	Difference
LCOE unconst. [EUR / MWh]	72,2	70.8	-1,4
LCOE constr. [EUR / MWh]	74,7	72,8	-1,9
Difference	2,5	2,0	

M = 4.5 EUR/MWh



Copyright © 2020, Bruno Schyska, DLR, Institute of Networked Energy Systems This work is licensed under a CC-BY-4.0 licence. Schyska et al. (2020), to be submitted, preprint on arxiv

The Sensitivity to Meteorological Parameters: Data


- RCP 8.5 climate projections from the CNRM-CERFACS-CNRM-CM5
- Scaled down within EURO-CORDEX
- Near-surface wind speed extrapolated to hub-height (90m) using the logarithmic wind profile
- Surface downwelling shortwave radiation and nearsurface air temperature for solar PV
- Total runoff for hydro power
- 5 time slices:
 - Historical (HIS): 1970 1976
 - Begin of century (BOC): 2000 2006
 - Mid of century (MOC): 2038 2044
 - End of century (EOC): 2094 2101

- PyPSA-Eur (one node per country)
- Including:
 - Load time series
 - Renewable potentials
 - Cost
 - Technologies
- Onshore + offshore wind, solar PV, OCGT, hydro, batteries, hydrogen storage
- 95% CO₂ reduction scenario

Schlott et al. (2018), Applied Energy, preprint on arxiv

Copyright © 2020, Bruno Schyska, DLR, Institute of Networked Energy Systems This work is licensed under a CC-BY-4.0 licence. Hörsch et al. (2018), Energy Strategy Reviews, arxiv preprint


Capacity Factor Changes towards the End of the Century

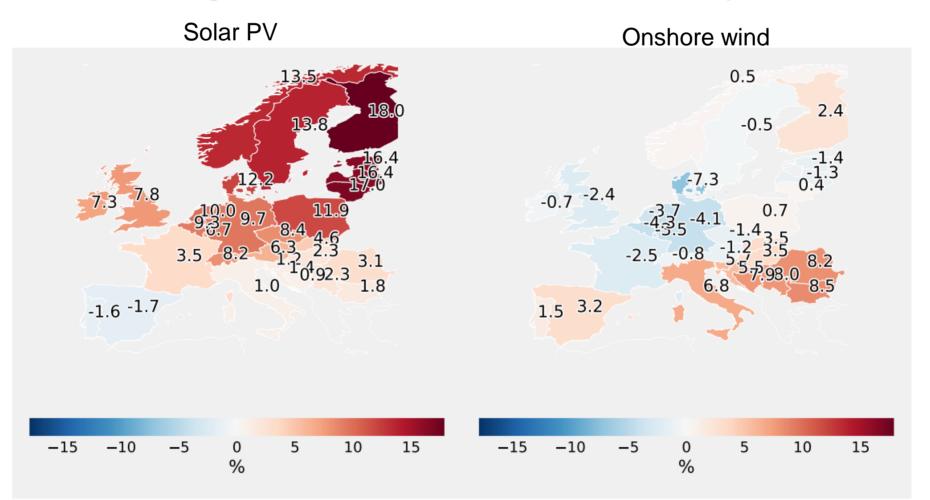

Relative change in 2094-2101 compared to historical period [%]

Schyska et al. (2020), to be submitted, preprint on arxiv


Differences in optimal Capacity Expansion

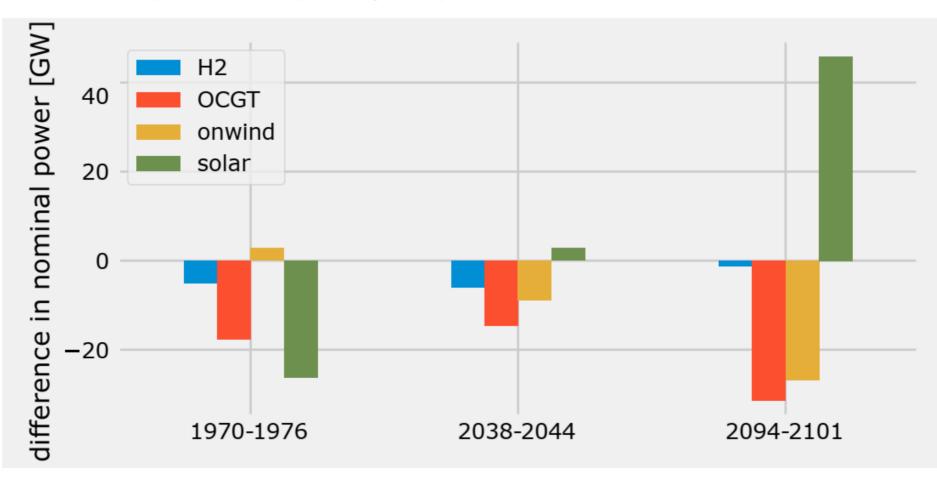

Difference in optimal capacity expansion compared to BOC [GW]

Schyska et al. (2020), to be submitted, preprint on arxiv

The Sensitivity to Meteorological Parameters

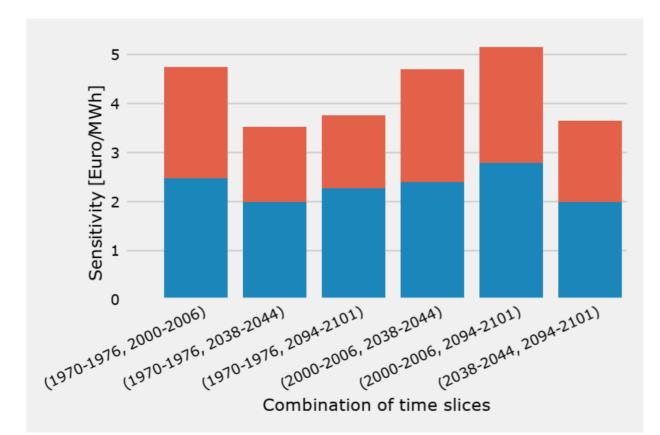

Thank you!

- Same order of magnitude as sensitivity to cost of capital
- Combinations with 2000 2006 exhibit highest sensitivities, e.g. higher as HIS + EOC
- 2000-2006 leads to *extraordinary* solution -> not representative
- Comparably low sensitivity on scenarios HIS, MOC and EOC

Conclusions

- Choosing the right weather data is as important as choosing the right cost.
- Better do not choose 2000-2006. You might get unrepresentative results.

Schyska et al. (2020), to be submitted, preprint on arxiv

